



Dealer Price List Model 900-VL-1 Security Door

PO Box 215 Carmel, IN 46082-0215
317-846-6750 fax 317-846-6753
www.doorsales.net 800-839-2293

Vertical Lift Diverter Switch Track

Price includes the following:

- 1.) Door Panels— are constructed of 1" x 2" x 14g steel tube mitered and welded to form the frame, 1/2" x 1/2" x 16 gauge flattened expanded mesh is welded to the frame. 1" x 1" x 1/8" steel angles are welded to the back of the panels for added strength and stability. Panels are powder coated in yellow, gray, white or black.
- 2.) Door hardware supplied for panels (Hardware is industry standard hinges, top fixtures, inside lock, self drilling tec screws)
- 3.) Track is supplied with industry standard 2" upper track. Lower track utilizes the existing door track through a set of diverter switches and special bottom fixtures.
- 4.) Additional hardware supplied include: vertical lift drums, cable, torsion springs, bearing plates, track bolts and nuts

Single Door Pricing—Volume Discounts available

900-VL-1	To 7" high	To 8' high	To 9' high	To 10' high	To 12' high	To 14' high	Replacement Section
8'2"	864.00	871.00	1,031.00	1,062.00	1,176.00	1,403.00	315.00
9'2"	889.00	898.00	1,081.00	1,113.00	1,221.00	1,464.00	336.00
10'2"	929.00	937.00	1,132.00	1,169.00	1,278.00	1,538.00	355.00
12'2"	1,055.00	1,068.00	1,316.00	1,348.00	1,485.00	1,774.00	431.00
14'2"	1,153.00	1,165.00	1,441.00	1,489.00	1,630.00	1,954.00	488.00
16'2"	1,248.00	1,259.00	1,570.00	1,626.00	1,779.00	2,133.00	547.00
18'2"	1,438.00	1,451.00	1,799.00	1,858.00	2,010.00	2,395.00	592.00
# Sections	2	2	3	3	3	4	
Section height	42"	48"	36"	40"	48"	42"	

Add for

HL to 54"	18.00	18.00	18.00	18.00	26.00	26.00
HL to 120"	22.00	22.00	22.00	22.00	34.00	34.00
3" Track	181.00	199.00	223.00	247.00	261.00	294.00
Dual Track	144.00	152.00	171.00	190.00	208.00	229.00
Dual Track 3"	231.00	248.00	279.00	310.00	342.00	386.00

Registered Dealer Price List
Effective 04/01/2005
Prices subject to change without notice.
All material copyrighted by Door Sales Inc.

900 Track Mounting Systems

The 900 is a unique sectional type door system that is designed to work in conjunction with existing sectional overhead door type doors. Shown below are the most common operational track connections to work with the existing door system.

Track Diverter Switch →

- Typical installation with a diverter switch allows the use of the same lower door track.
- The diverter switch is cut into the existing door track just below the door header.
- The diverter switch is supplied with special outside bottom fixtures and extended door shafts to allow the door cable to work outside the door track.
- This is the standard or typical set-up
- The door seal is created by using the existing jamb mounted weather-strip of the existing sectional door.
- Track diverter switch should only be used in vertical lift or high lift door openings.



← Dual Track

- Dual track provides an 8" spacer plate for the installation of both the existing door track and the screen door track.
- The dual track is supplied with the spacer plate and 2" or optional 3" track for the screen door.
- The door is supplied with special outside bottom fixtures and extended door shafts to allow the door cable to work outside the door track.
- The dual track is an optional set-up. The existing door can have 2" or 3" track and is completely independent of the screen door.
- Dual track can be used for any opening where there are no obstructions. Dual track should be used if you have high cycle, special mounting conditions or specific operational requirements.

Other Mounting Options

- Stand-Alone System - Stand-alone systems are for openings where there are no other doors. The door is mounted like any other sectional door on Vertical Lift, High lift (lift clearance), Standard lift or low headroom. Any standard sectional operational system is available for the stand alone units.
- Rolling Steel Door— Guide mounting plates and other special bracket attachment can be supplied to mount to the back of a rolling steel door. It is important to note head plate size, headroom, contour of the hood, track style of the rolling door.
- Special Mounting Options—Include stand-off frames, fixed mounting channels, horizontal mounting, sliding door mounts, swing door mounting and other special arrangements.



900 Track Lift Options

The 900 is a unique sectional type door system that is designed to work in conjunction with existing sectional overhead door type doors. Shown below are the most common track and spring configuration to work with the existing sectional door system. The door is supplied with special outside bottom fixtures and extended door shafts to allow the door cable to work outside the door track.

Highlift or Lift Clearance Track —>

- Typical high lift or lift clearance installation with a diverter switch allows the use of the same lower door track.
- The highlift track is for use in areas where the ceiling height does not allow the use of vertical lift track.
- The spring system can be located in several locations depending on field conditions. The spring can be located above the existing spring, at the back of the door tracks, at a midpoint location above both doors (as shown) or under the existing door between the door tracks. This is driven by field conditions and may require pulleys (not supplied) and adjusting the cable length.
- Highlift track is available in several lift options up to 54" lift clearance, 120" lift clearance and 164" lift clearance.



<— Vertical Lift Track

- Most common installation is a vertical lift track with diverter switch.
- The spring system can be mounted above the existing doors spring system (as shown). It can also be mounted between the existing overhead door and the screen door.
- The door is supplied with special outside bottom fixtures and extended door shafts to allow the door cable to work outside the door track.

Other Track Mounting Systems

- Standard lift track
- Low Headroom Track
- Dual Track
- Rolling Steel Door Attachments

900 Security Mesh Options

The 900 comes with a standard 1/2" x 1/2" x 16 gauge flattened expanded metal mesh.

Security Mesh

Standard Mesh is 1/2" x 1/2" x 16 gauge flattened mesh.

Keeps out intruders, prevent employee theft, keep animals, birds, and other wanted visitors.

Open factor of 60%
Opening size .250 x .750

Optional Mesh

Many other expanded mesh opening sizes and material thickness are available.

Special Architectural Designs

- Round Holes
- Square Holes
- Custom Patterns

Solid Material

- 16 gauge
- 10 gauge
- 1/4"

Optional Material Types

- Stainless Steel
- Aluminum
- Steel Wire
- Grating



900 Other Options

Most common optional add items for the model 900

PO Box 215 Carmel, IN 46082-0215
317-846-6750 fax 317-846-6753

www.doorsales.net 800-839-2293

Registered Dealer Price List 04/01/2005.
Prices Subject to Change without notice. All
material copyrighted by Door Sales Inc.

Other Security Mesh

- Other mesh sizes and thickness
- Custom Hole Shapes
- Solid Panels - 16G, 10g or 1/4" Plate
- Bar or Grating

Call for Quote

Solid Shaft 1" full keyway

Add \$ 4.59 per ft. of door width plus 24"

Motor—Must add solid shaft for high lift or vertical lift doors.

Call for Quote

Door Interlock Switches for Diverter Switches with motor operators

Add \$ 97.00 per interlock

Paint Finishes

Galvanized Finish - Call for Quote

Custom Powder Coated Colors—Call for Quote

Track—Power Coating

Call for Quote

Track

- Stand Alone Track
- Standard Lift Track
- Low Headroom Track

No additional charge for stand alone track.

Standard lift and low headroom track used with a diverter switch will not allow the top section to go into a vertical position.

Call for quote on standard lift LHR track.

Exterior mounted hood cover—Hood cover is constructed of 24 gauge sheet metal with powder coated finish and mounting brackets. Finish would be the same as the door finish color.

Add \$ 14.65 per liner foot of door width plus 2"

Torsion Spring Options

Add 20% to door cost for 50,000 cycle springs

Add 34% to door cost for 100,000 cycle springs

Weight Counter Balanced—Call for Quote

Frame Thickness

- 2" x 2" Tube 10g, 1/8, 1/4
- 3" x 3" Tube 10g, 3/16, 1/4, 3/8, 1/2, 5/8, 1
- 4" x 4" Tube 10g, 3/16, 1/4, 3/8, 1/2, 5/8, 1

Call for Quote

Frame Materials

- Stainless Steel
- Aluminum

Call for Quote

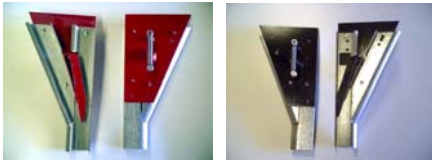



900 Replacement Parts Sales Tools

PO Box 215 Carmel, IN 46082-0215
317-846-6750 fax 317-846-6753

www.doorsales.net 800-839-2293

Registered Dealer Price List 04/01/2005.
Prices Subject to Change without notice. All
material copyrighted by Door Sales Inc.

<p>Diverter Switches</p>	<p>Set for 2" track \$ 125.00</p> <p>Set for 3" track \$198.00</p>	
<p>Bottom Fixtures</p>	<p>\$35.00 per set</p> <p>Special outside bottom fixtures designed for proper clearance of the diverter track.</p>	
<p>Samples</p>	<p>Security Mesh—No Charge Frame Sample—No Charge Literature —No Charge Panel Sample—\$92.00*</p>	<p>* Panel sample refunded with the purchase of a door. Panel sample size 24" x 12" - Powder coating in yellow or gray. Special power coated color options available.</p>
<p>Common Door Parts:</p>	<p>See Parts Page</p>	<ul style="list-style-type: none"> • Rollers • Cable • Hinges • Springs • Spring Plugs • Top Fixtures • Drums • Shaft • Bearing Plates • Couplers • Hardware • Other Parts